



405 mm



500x500 mm

OPTIONAL:

PAP: Rinse booster pump.

PDS: Detergent dosing.

PS: Drain Pump.

A: Watersoftener.

N 1 3 0 0 TRONIC


Built to last - the sub frame, wash tank, panels, rinse boiler, wash arms are manufactured using AISI 304 grade stainless steel and other components of non corrosive materials.

Insulated double skin cabinet construction reduces energy costs, noise levels and keeps the wash area ambient temperature, to an absolute minimum.

High efficiency, self draining wash pump for greater hygiene and ultimate washing power.

Specially designed stainless steel, indented anti-clog wash arms, easily removed for cleaning, without tools.

Pressed moulded wash tank with radial corners and double filters for hygiene and easy maintenance.

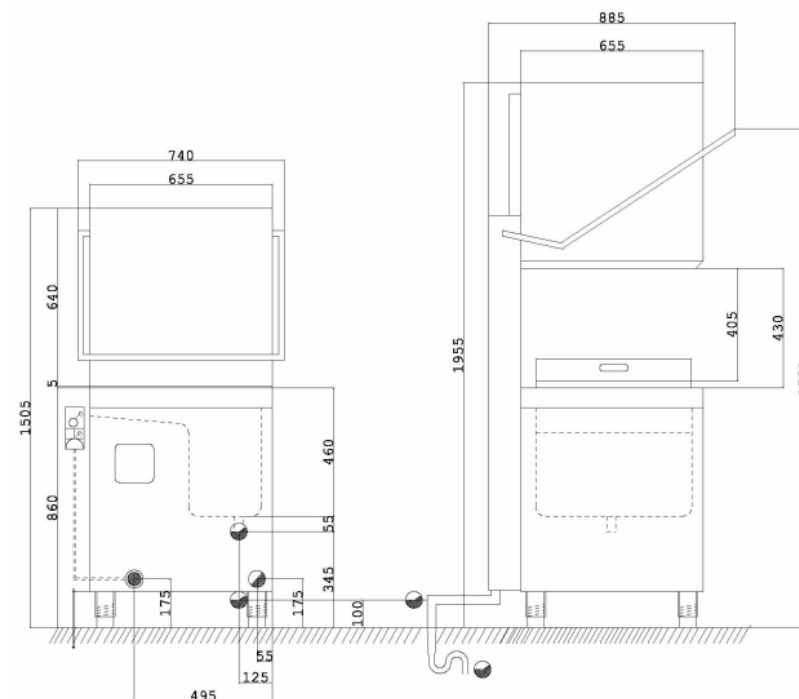

Power supply	V	400V/3+N 230V/1
Frequency	Hz	50
Max. power consumed	kW	7,1
Boiler element power	kW	6
Tank element power	kW	3
Wash pump power	kW	1,1
Water supply pressure	kPa	200-400
Water supply temperature	°C	50 – 60
Water supply hardness	°dF	7 – 12
Water consumption per rinse	l	3
Boiler capacity	l	9
Tank capacity	l	35
Standard cycle duration with water supply at 50°C	s	75/120/180/c
Noise level	dB(A)	67
Protection rating	IPX	1
Net Weight	kg	123
Power cable type	◀HAR▶	H07RN-F